Conveyor Stands

Tube Type

Conveyor Stands

I Type / H Type

(Adjuster)

700~990 1000~1200

(Caster)


CSTS


Dedicated web site http://fa.misumi.jp/cvs/ Conveyor selecting, component purchases. and easy search for maintenance parts are available.

Features: Stands of which height is adjustable up to 200 mm. Useful when switching lines.




CSTPF (Foot Type)






CSTPC (Caster Type)




[X=20]



L Type Bracket Detail View The top view is Xmin and moves by slotted holes (Kx2).

[X=65, 85]



- The (3) bracket mount rotates 360°.
- \P When X = 20 ~ 85, the intermediate plate will not be provided To secure the foot, use Fixing Plates (FJKMT12) on ■ P. 2 -1112.

-26 9

- For the foot type, heights cannot be finely adjusted using adjusters.
- For the ⑦ caster type, three casters have stoppers.
- The conveyor mount part height is L + 24 + 110 when X = 20 and is L + 64 + 110 when $X = 65 \sim 425$. (Tolerance: ± 2)

X Adjustable Range			
х	X Adjustable Range		
	min	max	
20	20	30	
65	65	85	
85	85	125	
125	125 165		
165	165	295	
295	295	425	
425	425	555	

Part Number		Х	X L	Load	Unit Price	
Туре	Shape	Selection	Selection	Capacity (N)	CSTPF	CSTPC
CSTP	_	20 65 85	385 585 785			
	•	125 165	390 590 790	925		
	(Caster)	295 425	389 589 789			

Infin	toly variable adjusts	nont ic available for V a	nd L within the adjustabl	o rongo chown in	the right table
	lely variable aujubli	liciil io avaliaule iui 🔨 a	iiu L williii liib aujuolabi	C Tallyc Siluwii III	uic iiyiil labic.

Maintenance Parts Number					
Caster					
No Stopper	With Stopper	Foot			
CTYNB50-12 (P. 2-1101)	CTYNBS50-12 (P. 2-1101)	NFJN12-50			

	7	N	0	te	
--	---	---	---	----	--


The product does not have fall-prevention mechanism. Avoid adjusting the stand height when the conveyor is attached. Handle the product with utmost care.


L Type Bracket Dimension Details					
Х	Α	٧	Р	K	
20	21.8	56	36	5	
65	31.5	36	40	10	
85	41.5	56	36	20	
125	41.0	96			
165		144			
295	82	274		65	
425		404			

■L Adjustable Range					
х	-	L Adjustable Range			
^	_	min	max		
20	385	385	585		
65	585	585	785		
85	785	785	985		
405	390	390	590		
125 165	590	590	790		
	790	790	990		
295 425	389	389	589		
	589	589	789		
	789	789	989		

*Tapped Hole for Mounting Conveyor Options



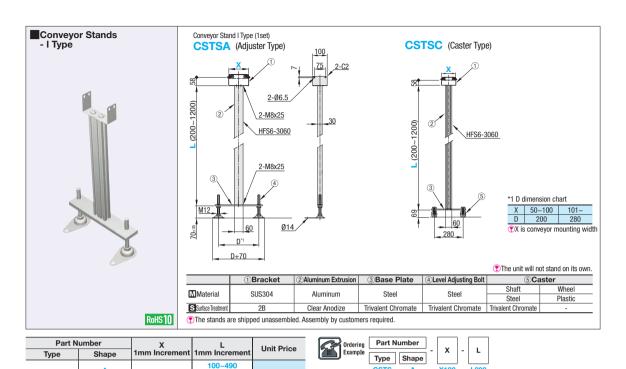

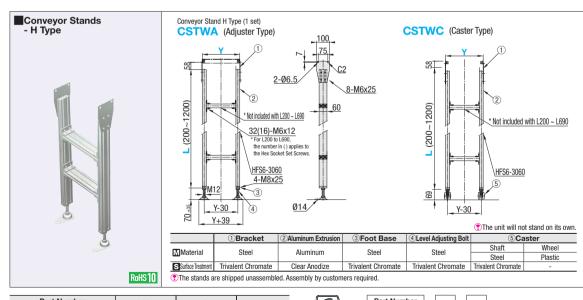

ľ	Part Number		Υ	L	Unit Price	
	Type	Shape	1mm Increment	1mm Increment	Onit Price	
	CSTW	٨		100~490		
		(Adjuster)	150~600	500~690		
		CSTW	C	150~600	700~990	
		(Caster)		1000~1200		

