

# Shaft Collar Clamp

## 2-Hole / 2-Tapped (Coarse)

**2-Hole**  
**2-Tapped (Coarse)**

RoHS10


Type		Material	Surface Treatment	Accessory Hex Socket Head Cap Screw 1 pc.
2-Hole	2-Tapped			
SCSM	SCSW	S45C Equivalent	Black Oxide Coating	MSCM435 Equivalent
PSCSM	PSCSW	SUS304 Equivalent	Electroless Nickel Plating	MSS304 Equivalent

25 / (6.3 / √)

\*D6 ~D25: C0.5  
D30~D50: C1

Part Number Type	B Selection D	D1	M (Coarse)	d	R	W	X	Y	Z	P	2-Hole Unit Price			2-Tapped Unit Price			
											SCSM	PSCSM	SSCSM	M1 (Coarse)	SCSW	PSCSW	SSCSW
6	*8	20	M3	3.4	3	1	6	4	6~6.5	12	3.5						
			M4	4.5	3.75					13							
	*10	25	M3	3.4	3		8		7~9	14	4.5						
			M4	4.5	3.75					18							
	*12	30	M5	5.5	4.5		9	5	7~10	20	5.5						
			M6	6.6	6												
	*8	35	M3	3.4	3		10	6	8~12	24	6.6						
			M4	4.5	3.75												
	*10	30	M4	4.5	3.75		11	5	9~10	22	5.5						
			M5	5.5	4.5												
	*12	35	M6	6.6	6		12	6	9~12	24	6.6						
			M3	3.4	3												
*10	30	M4	4.5	3.75	13	5	10~12	23	5.5								
		M5	5.5	4.5													
*12	35	M6	6.6	6	14	6	10~11	23	4.5								
		M4	4.5	3.75													
*10	34	M4	4.5	3.75	15	8	11~13	26	5.5								
		M5	5.5	4.5													
*15	40	M6	6.6	6	16	8	11~12	24	4.5								
		M5	5.5	4.5													
*10	35	M5	5.5	4.5	17	6	11~13	26	5.5								
		M6	6.6	6													
*15	40	M6	6.6	6	18	8	11~13	28	6.6								
		M5	5.5	4.5													
*12	30	M4	4.5	3.75	19	7	16	36	5.5								
		M5	5.5	4.5													
*15	40	M6	6.6	6	20	8	13~15	34	6.6								
		M5	5.5	4.5													
*10	25	M6	6.6	6	21	10	16~20	40	6.6								
		M5	5.5	4.5													
*15	30	M6	6.6	6	22	11	18~20	44	9								
		M5	5.5	4.5													
*12	20	M5	5.5	4.5	23	12	21	48	6.6								
		M6	6.6	6													
*15	25	M6	6.6	6	24	13	23	56	9								
		M8	9	7													
*18	30	M8	9	7	25	16	28	68	11								
		M10	11	9													

Ordering Example: Part Number - B  
SCSM10 - 10

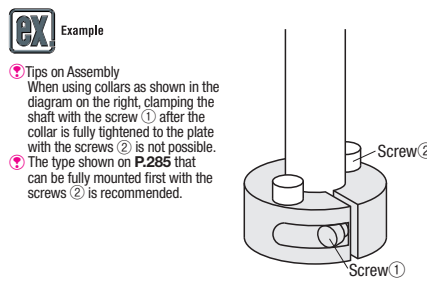

# Shaft Collar Clamp

## 3-Hole / 3-Tapped (Coarse)

**3-Hole**  
**3-Tapped (Coarse)**

RoHS10

Type		Material	Surface Treatment	Accessory Hex Socket Head Cap Screw 1 pc.
3-Hole	3-Tapped			
SCST	SCSTR	S45C Equivalent	Black Oxide Coating	MSCM435 Equivalent
PSCST	PSCSTR	SUS304 Equivalent	Electroless Nickel Plating	MSS304 Equivalent

25 / (6.3 / √)

\*D6 ~D25: C0.5  
D30~D50: C1

Part Number Type	B Selection D	D1	M (Coarse)	d	R	W	X	Y	Z	P	3-Hole Unit Price			3-Tapped Unit Price			
											SCST	PSCST	SSCST	M1 (Coarse)	SCSTR	PSCSTR	SSCSTR
6	*8	20	M3	3.4	3	1	6	4	6~6.5	12	3.5						
			M4	4.5	3.75					13							
	*10	25	M3	3.4	3		8		7~9	14	4.5						
			M4	4.5	3.75					18							
	*12	30	M5	5.5	4.5		9	5	7~10	20	5.5						
			M6	6.6	6												
	*8	35	M3	3.4	3		10	6	8~12	24	6.6						
			M4	4.5	3.75												
	*10	30	M4	4.5	3.75		11	5	9~10	22	5.5						
			M5	5.5	4.5												
	*12	35	M6	6.6	6		12	6	9~12	24	6.6						
			M3	3.4	3												
*10	30	M4	4.5	3.75	13	5	10~12	23	5.5								
		M5	5.5	4.5													
*12	35	M6	6.6	6	14	6	10~11	23	4.5								
		M4	4.5	3.75													
*10	34	M4	4.5	3.75	15	8	11~13	26	5.5								
		M5	5.5	4.5													
*15	40	M6	6.6	6	16	8	11~12	24	4.5								
		M5	5.5	4.5													
*10	35	M5	5.5	4.5	17	6	11~13	26	5.5								
		M6	6.6	6													
*15	40	M6	6.6	6	18	8	11~13	28	6.6								
		M5	5.5	4.5													
*12	30	M4	4.5	3.75	19	7	16	36	5.5								
		M5	5.5	4.5													
*15	40	M6	6.6	6	20	8	13~15	34	6.6								
		M5	5.5	4.5													
*10	25	M6	6.6	6	21	10	16~20	40	6.6								
		M5	5.5	4.5													
*15	30	M6	6.6	6	22	11	18~20	44	9								
		M5	5.5	4.5													
*12	20	M5	5.5	4.5	23	12	21	48	6.6								
		M6	6.6	6													
*15	25	M6	6.6	6	24	13	23	56	9								
		M8	9	7													
*18	30	M8	9	7	25	16	28	68	11								
		M10	11	9													

Due to no slitting on the opposite side of the screw, 3-Hole/3-Tapped type has less gripping power compared to 2-Hole/2-Tapped Type.  
Use of MISUMI Shafts (standard g6 and h5) is recommended.  
2-Hole and 2-Tapped Type or Wedge Type (P.285) are recommended where more shaft gripping power is required.

Ordering Example: Part Number - B  
SCST10 - 10