

Angled Brackets


For 8 Series (Slot Width 10mm) Aluminum Extrusions



Free Angle Brackets

For 8 Series (Slot Width 10mm) Aluminum Extrusions



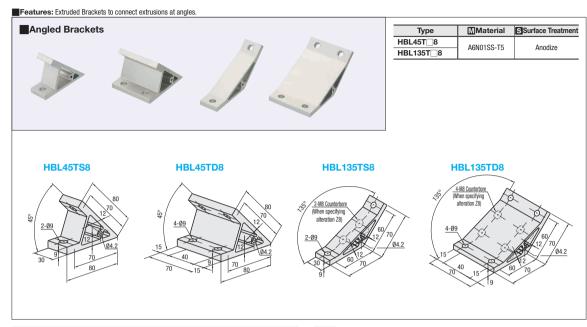

Part Number		Applicable Screw, T Nut			Allowable Load	Unit Price	Volume Discour Rate	
Number	(g)	Screw	Quantity	T Nut	Quantity	(N)	1~99 pc(s).	100~200
HBL45TS8	88	CBM8-20	2		2	2058		
HBL45TD8	204		4	HNTT8-8	4	2940		
HBL135TS8	103		2	11111110-0	2	2058		
HBL135TD8	240		4		4	2940		











Alterations Code		Spec.	Applicable Bracket	
Mounting Hole Alteration for Cover	O	Adds taps on a bracket for cover mounting. (M5 on Both Sides, Depth 15mm) (Mounting Screw HCBM on P.754) Edusions & Brackets	HBL45TS8 HBL135TS8	
Counterbored Holes on	Z 8	135 Degree Bracket Adds two counterbored holes on HBL135T 8.	HBL135TS8	
135 Degree Bracket	20	(Applicable Screws: M8) Not available in combination with Applicable Screws and Nuts.	HBL135TD8	

Alterations	Code	Spec.	Applicable Bracket
	SET SST (Stainless Steel) SEU / Pre-Assembly Insertion \	Applicable screws and nuts for fixing the brackets on extrusions come in a set. (Adds to the bracket price.) (Ex.) When HBL45TS8 is specified:	HBL45TS8
Applicable Screws and	Spring Nuts SSU Pre-Assembly Insertion Spring Nuts	CODE Screw Nut SET CBM8-20 HNTT8-8 SST SCB8-20 HNTTSN8-8 SEU CBM8-20 HNTU8-8	HBL45TD8
Nuts Set	SEP (Post-Assembly Insertion Spring Nuts)	SSU SC88-20 SHNTU8-8 SEP CBM8-20 HNTP8-8 SSP SC88-20 SHNTP8-8 • When specifying other than HBL45TS8. check for	HBL135TS8
	SSP (Post-Assembly Insertion Spring Nuts Stainless Steel	the applicable screws and nuts.	HBL135TD8

• Included Screw is not RoHS compliant when -SET. -SEU or -SEP are specified.

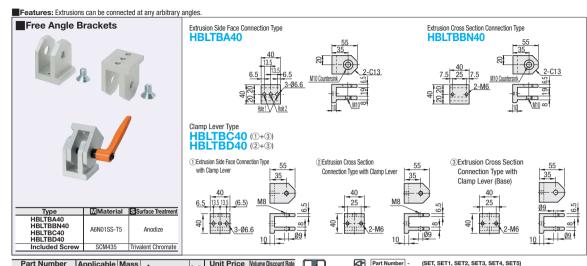













(1) Connection of Two End Sections


Two pieces of HBLTBBN are used to connect two end sections using Pre-Assembly Insertion Double Joints (P663), (With Clamp Lever Type: HBLTBD40)





(2) Connection of Two Side Faces


To the extrusion side face, connect with HBLTBA, a screw and a nut. To the end face, use 1 HBLTBBN for 1 HBLTBA using Pre-Assembly Insertion Double Joints. (With Clamp Lever Type: HBLTBC40)


















CBST8-15



s to fix at arbitrary position	JIIS.				
Brackets	HBLPBL	HBLPBR	Ordering Example	Part Number HBLPBL8	
	113 40 19 3-08.8 19 3-08.8 20 19 5-R2	3.2 3.2 5-R2 118 20			
omate RoHS 10					
Applicable Screw and Nut Unit Price Number Part Number (SET, SET1)					



Alterations	Code	Spec.	Applicable Bracket		
Applicable Screws and Nuts Set	SET	Supplies a set of applicable screws and nuts for fixing the bracket to a extrusion.	HBLPBL8 HBLPBR8		
Set with applicable screws, nuts and clamp levers	SET1	Applicable Screw: 3 pcs. Clamp Lever (LNP): 1 pc. Flat Washer (PWF): 1 pc. Applicable Nut: 4 pcs. Set with the above items.	HBLPBL8 HBLPBR8		



Part Number



HNTT8-8

1~99 pc(s). 100~150