
Similar Product Pages P. 711, P. 712

# NEW C-MISUMI

# Precision Ball Screws Standard Nut - Shaft Dia. 12; Lead 5, 10 (C-BSSH) Accuracy Grade C5

Points of comparison between similar products

Load rating, axial clearance and nut dimensions of C-VALUE products are different from those of similar products. (For details, seeP. 771 to P. 712.) When opting for C-VALUE products, select them by comparing specifications of similar products.

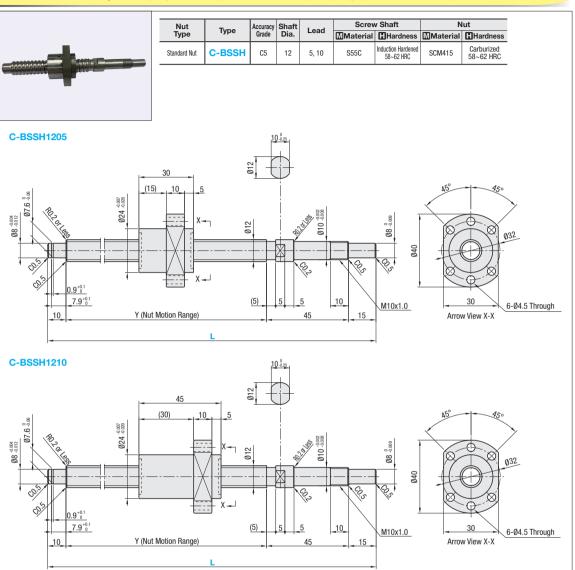

Nut Type	Accuracy Grade	Part Number			1 mm Increments		Ball	Ball	Screw	Number	Basic Load Rating		Axial	Preload	Twisting
		Туре	Screw Shaft O.D.	Lead	L	Y	Dia.		Root Dia.	of Circuits	C (Dynamic) kN	Co (Static) kN	Play	Torque N⋅cm	Direction
Standard Nut	C5	C-BSSH	12	05	150~450	L-70	2.5	12.3	(9.8)	2.8 turns 1 row	4.2	6.9	0.008 or less	1.0 or less	- Right
				10	200~600						2.7	4.1		2.0 or less	
kgf = N x 0.101972															

Nut Type	Accuracy	Part Number	JPY Unit Price: 1 to 4 pc(s).							
Nut Type	Grade	Part Number	L150~200	L201~295	L296~400	L401~450	L451~600			
Standard Nut	C5	C-BSSH1205					-			
	65	C-BSSH1210								








1205 - :

### Notes

- Filled with lithium soap based grease (Alvania Grease S2 made by Showa Shell Sekiyu K.K).
- For accuracy of Ball Screws, seeP. 2223 and P. 2224.
- For details of Support Units, seeP. 753 to P. 778.
- Cautions: Do not let the nuts overrun or remove the nuts from the screw shafts.
- It may cause the balls to fall out or damage the ball recirculation parts.
- Note that, when a ball screw shaft or ball screw nut is tilted, it may fall out due to its own weight.
  The collar included with the Support Unit product should be installed and tightened on the nut side of the ball screw.

Part Number - L - (FC, KC...etc.)



[Do not let a nut overrun]

[Do not take a nut off]



1-002-2018

Alterations	Code	Spec.
No Machining on Support Side Shaft End	NC	No machining added on the support side shaft end.  Ordering Code NC
Ball Nut Orientation Reversed (Support Side) Std. (Fixed Side) Revised	RLC	Changes the nut direction.  Ordering Codel RLC
No Retaining Ring Groove on Support Side Shaft End	RNC	No retaining ring groove is machined on the support side shaft end.  Ordering Code RNC  Combination with FC is not available.
Change Support Side Shaft End Machining	GC	Changes the machining on the support side. Q is selectable from 6 or 8. ♥ Y dimension is shortened. G = 1 mm Increments Ordering Code GC-Q8-G20 ♥ 5 ≤ G ≤ Q x 3 ♥ No Retaining Ring Groove ⊗ Combination with FC is not available.
Change Support Side Shaft End Length		Changes the length of the support side shaft end.

Size  $\ell$  FC Range
1205 7.9 11 ≤ FC ≤ 20

• Y dimension is shortened.

Combination with GC is not available.

Alterations	Code	Spec.
Keyway on Fixed Side Shaft End Detailed Keyway Dimensions Ext P. 684	КС	Adds a keyway on the fixed side shaft end. $KC = 1 \text{ mm increments}$ $\underline{\text{Ordering Code}} KC10$ $\underline{ \mathfrak{T} 3} \leq KC \leq 14$
Keyway on Fixed Side Shaft End	KLC	Adds a keyway at a customer specified area on the fixed side shaft end. (Keyway dim. is same as that of KC.) $K, S = 1 \text{ mm Increments}$ $ \frac{\text{Ordering Codil}}{\text{KLC-KS-S1}} $ $ \$ 4 \le K + S \le 14 $
Flat Machined on Fixed Side Shaft End Sc 0.5	sc	Adds a flat on the fixed side shaft end. $SC = 1 \text{ mm Increments}$ $\underline{Ordering Code} SC7$ $\underline{\bullet} 5 \leq SC \leq 14$
2 Flats Machined on Fixed Side Shaft End  SWC SGC SWC SGC SWC SGC SWC SGC SWC SGC	SWC SGC	Adds two flats on the fixed side shaft end. SWC: 90° Position, SGC: 120° Position 1 mm Increments <u>Ordering Code</u> SWC10

## **Peripherals:**Combination with the following parts is available.



Support Units (Square, Low Profile) Support Units (RC Nut Brackets for C-Value Ball Screws are not available.

# ■Combination with Support Units

Combination with Support Onits										
Ball Scre	w Part Nu	ımber	Recommended Support Unit							
Туре	Screw Shaft	Lead	Part Nun	nber	Shape	Fixed	Support	Page		
	0.D.		Type	No.	Silape	Side	Side	raye		
C-BSSH	12	05 10	C-BRW	10S	Round	0		P. 787		
			C-BUR	10	nound			P. 788		
	12		C-BSW	10S	Square	0		P. 781		
			C-BUN	10			Ó	P. 782		

• Other than the part numbers shown above, a rich variety of Support Units are also available. (P. 761~P. 778)



1-001-2018